



Engine	Cummins QSB 7
Gross Power	140 kW (188 hp / 190 ps) @ 2,050 rpm
Net Power	132 kW (177 hp / 179 ps) @ 2,050 rpm
Maximum Dig Depth	14,815 mm
Standard Bucket Capacity	0.4 m ³
Operating Weight	29,000 kg

925E
EXCAVATOR
LONG REACH ARM

925E SPECIFICATIONS

ENGINE	
Emission Regulation	Tier 3 / Stage IIIA
Manufacturer	Cummins
Model	QSB 7
Gross Power	140 kW (188 hp / 190 ps) @ 2,050 rpm
Net Power	132 kW (177 hp / 179 ps) @ 2,050 rpm
Peak Torque	800 N·m @ 1,200 rpm
Number of Cylinders	6
Displacement	6.7 L

TRACK DRIVE	
Maximum Travel Speed	5.5 km/h
Drawbar Pull	229 kN

UNDERCARRIAGE	
Shoe Width	800 mm
Number of Shoes, Each Side	51
Number of Bottom Rollers per Side	9
Number of Upper Rollers per Side	2

HYDRAULIC SYSTEM	
Main Pumps Total Flow	480 L/min
Relief Pressure, main	34.3 MPa

SWING SYSTEM	
Swing Speed	10.5 rpm


WORKING RANGE	
Max. Digging Reach	18,365 mm
Max. Digging Reach on Ground	18,265 mm
Max. Digging Depth	14,815 mm
Max. Digging Depth, 2.44 m (8') Level	14,600 mm
Max. Vertical Wall Digging Depth	12,675 mm
Max. Cutting Height	14,030 mm
Max. Dumping Height	12,030 mm
Min. Front Swing Radius	5,970 mm

REFERENCE ARM	
Arm Length	8,000 mm
Boom Length	10,350 mm

BUCKET PERFORMANCE	
Standard Bucket Heaped Capacity (Referenced)	0.4 m ³

SERVICE CAPACITIES	
Fuel Tank	470 L
Engine Oil	25 L
Cooling System	25 L
Hydraulic Reservoir	210 L
Hydraulic System Total	330 L

DIMENSIONS	
A Shipping Length	14,625 mm
B Shipping Height – Top of Boom	3,550 mm
C Track Gauge	2,590 mm
D Undercarriage Width	3,390 mm
E Length to Center of Rollers	3,840 mm
F Track Length	4,635 mm
G Overall Width of Upper Structure	2,760 mm
H Tail swing Radius	3,140 mm
I Counterweight Ground Clearance	1,055 mm
J Overall Height of Cab	3,050 mm
K Min. Ground Clearance	440 mm
L Track Shoe Width	800 mm

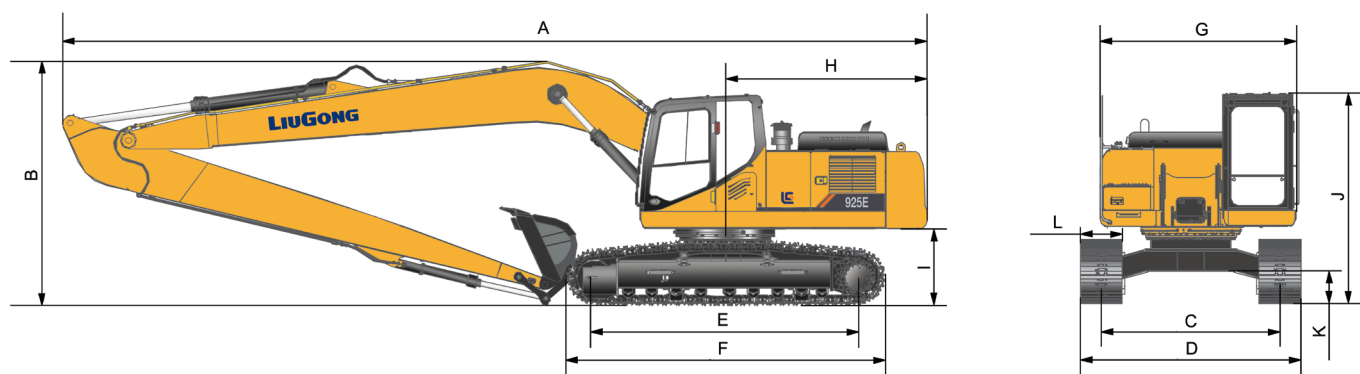

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
 T: +86 772 3886124 E: overseas@liugong.com
 www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

05/2022 Designed by LiuGong
 Replace the previous versions of 04/2022